

FREQUENCY INDEPENDENT DATA

Description: directional end fire yagi array,
field adjustable pattern

Frequency: 326-353 MHz, 336-364 MHz,
365-395 MHz, 380-410 MHz,
405-440 MHz, 440-475 MHz

Impedance: 50 ohm

Gain: 9 dBi

H -3 dB: 52°

E -3 dB: 46°

F/B: 0 dB

Polarization: vertical/horizontal

Connector: N-female/TNC-female

VSWR: < 1.5

Radome: UV resistant ABS/FG,
RAL 7012, PU foam filling

Radiator: copper

Passive
elements: coated aluminium


Attachment: Ø 35-60 mm, aluminium alloy
bracket, stainless steel V-bolts
and self-locking nuts

Lightning
protection: DC-short circuited

Temperature: -40°C - +80°C

IP: 67

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- DC shorted feed point
- integrated impedance compensation
- integrated RF choke

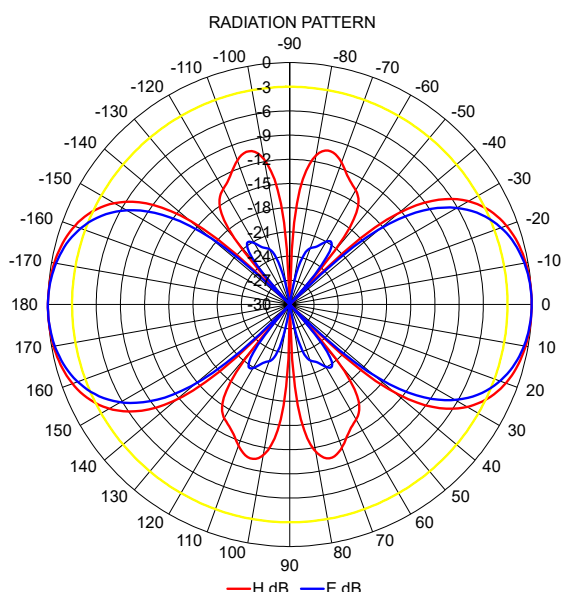

HCM 026DE31 023LA10



RoHS
COMPLIANT

CompleTech
ComAnt® -antennas by CompleTech, Finland

CAF2++ DIRECTIONAL END FIRE YAGI ARRAY