



ComAnt[®] Communications Antennas

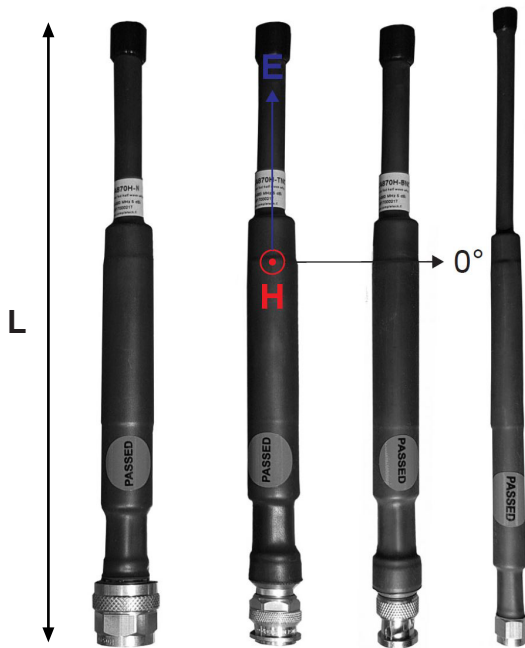

FREQUENCY INDEPENDENT DATA

Description: center fed half wave whip with elevated feed
 Frequency: 405-440 MHz, 440-475 MHz, 860-880 MHz, 900-930 MHz, 2400-2500 MHz
 Impedance: 50 ohm
 Gain: 5 dBi
 H -3 dB: 35°
 E -3 dB: 0 dB
 F/B: 0 dB
 Polarization: vertical
 Connector: BNC-male/N-male/SMA-male/TNC-male
 VSWR: < 1.5
 Radome: PE, heat shrink adhesive tubing
 Radiator: copper
 Attachment: directly to terminal
 Temperature: -40°C - +80°C
 IP: 62

- directly connected to radio
- no ground plane required
- improved decoupling

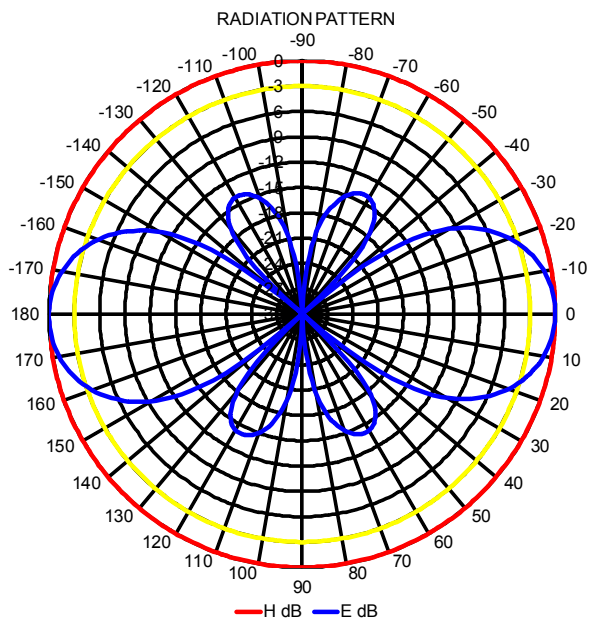

CAH CENTER FED HALF WAVE WHIP



RoHS
Compliant

CompleTech
ComAnt[®]-antennas by CompleTech, Finland