

FREQUENCY INDEPENDENT DATA

Description: cross-polarized yagi, dual feed, physically quarter wavelength along the boom phased

Frequency: 380-410 MHz, 405-440 MHz, 440-475 MHz, 703-803 MHz, 791-862 MHz, 830-890 MHz, 880-960 MHz

Impedance: 50 ohm

Gain: 10/10 dBi

H -3 dB: 55/54°

E -3 dB: 54/52°

F/B: 12/11 dB

Polarization: circular/slanted

Isolation: 30 dB

Connector: 2*N- / 2*TNC- / 2*7/16-female

VSWR: < 1.5

Radome: UV resistant ABS/FG, RAL 7012, PU foam filling

Radiator: copper

Passive elements: coated aluminium


Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self-locking nuts

Lightning protection: DC-short circuited


Temperature: -40°C - +80°C

IP: 67

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- DC shorted feed point
- integrated impedance compensation
- integrated RF choke

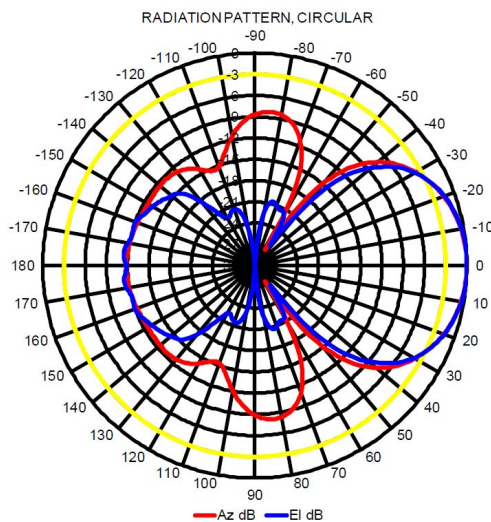

CS-power splitter required in circular mode

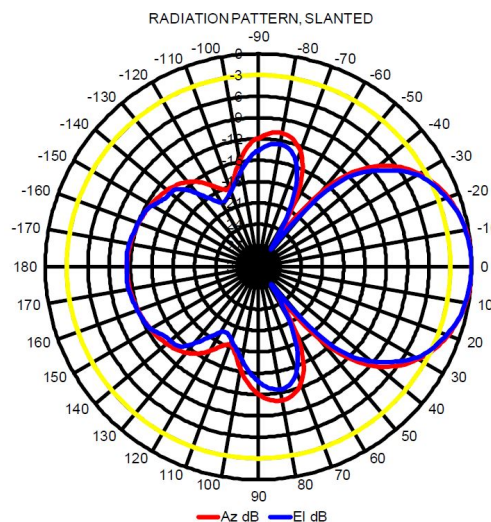

CAX++ CROSS-POLARIZED YAGI



RoHS
Compliant

CompleTech
ComAnt[®] -antennas by CompleTech, Finland