



FREQUENCY INDEPENDENT DATA

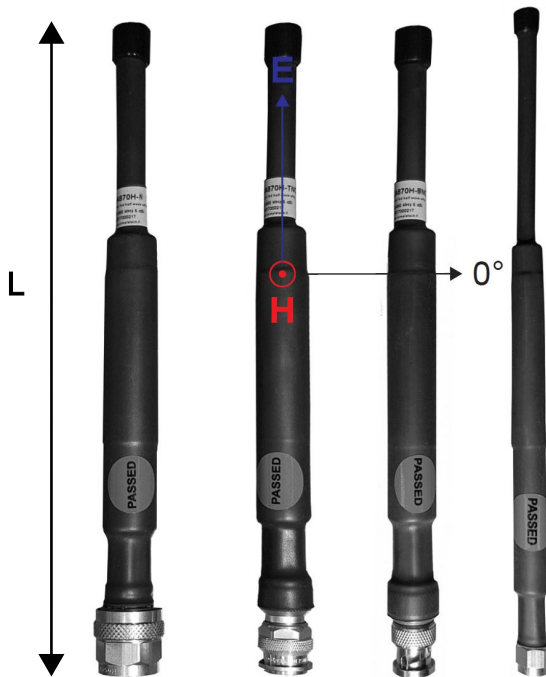

Description:	center fed half wave whip with elevated feed
Frequency:	405-440 MHz, 440-475 MHz, 860-880 MHz, 900-930 MHz, 2400-2500 MHz
Impedance:	50 ohm
Gain:	5 dBi
H -3 dB:	
E -3 dB:	35°
F/B:	0 dB
Polarization:	vertical
Connector:	BNC-/ N-/ TNC-/ SMA-male
VSWR:	< 1.5
Radome:	PE, heat shrink adhesive tubing
Radiator:	copper
Attachment:	directly to terminal
Temperature:	-40°C - +80°C
IP:	62

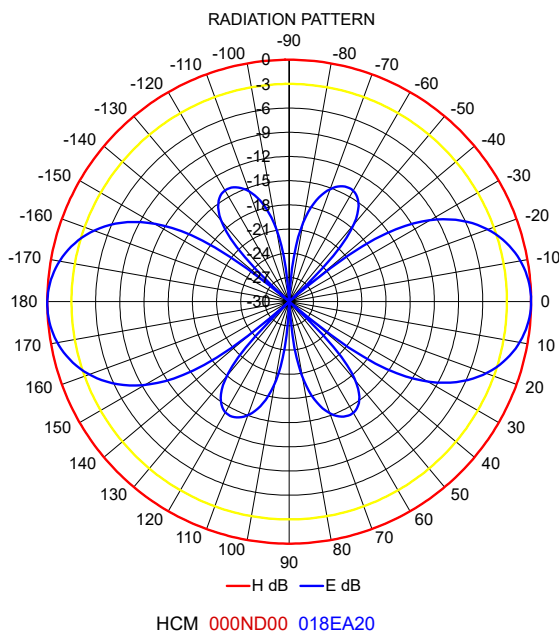

- *directly connected to radio*
- *no ground plane required*
- *improved decoupling*

CAH CENTER FED HALF WAVE WHIP