

FREQUENCY INDEPENDENT DATA

Description: cross-polarized yagi, dual feed, physically quarter wavelength along the boom phased

Frequency: 380-410 MHz, 405-440 MHz, 440-475 MHz, 703-803 MHz, 791-862 MHz, 830-890 MHz, 880-960 MHz

Impedance: 50 ohm

Gain: 8/8 dBi

H -3 dB: 69/68°

E -3 dB: 68/65°

F/B: 12/12 dB

Polarization: circular/slanted

Isolation: 30 dB

Connector: 2*N- / 2*TNC- / 2*7/16-female

VSWR: < 1.5

Radome: UV resistant ABS/FG, RAL 7012, PU foam filling

Radiator: copper

Passive elements: coated aluminium

Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self-locking nuts


Lightning protection: DC-short circuited

Temperature: -40°C - +80°C


IP: 67

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- DC shorted feed point
- integrated impedance compensation
- integrated RF choke

CS-power splitter required in circular mode

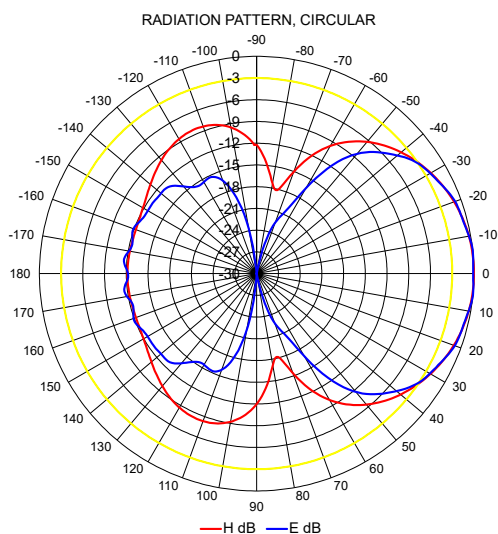

HCM 037EA25 035LA00

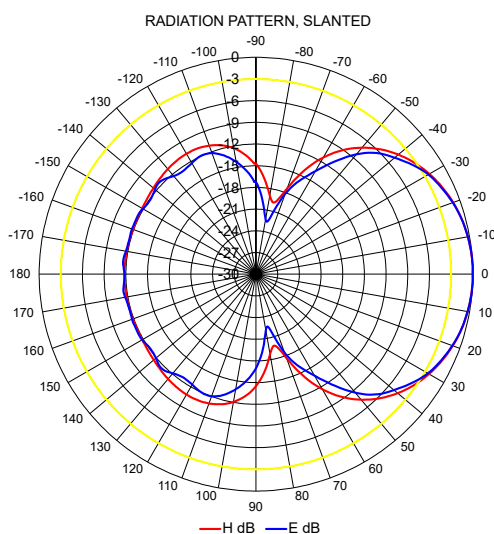

HCM 035EA28 033LA00



RoHS
COMPLIANT

CompleTech
ComAnt[®] -antennas by CompleTech, Finland

CAX+ CROSS-POLARIZED YAGI