


ComAnt[®] Communications Antennas


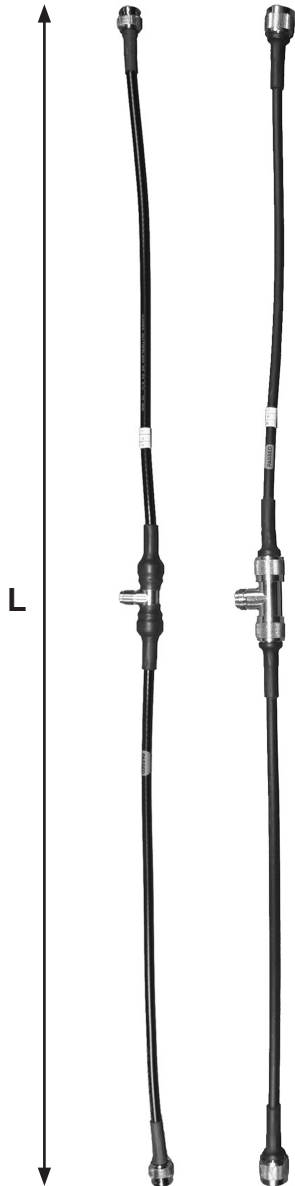


FREQUENCY INDEPENDENT DATA

Description: 1 to 2 power splitter
 Frequency: 135-145 MHz, 144-156 MHz, 154-166 MHz, 163-177 MHz, 221-239 MHz, 326-353 MHz, 336-364 MHz, 365-395 MHz, 380-410 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 880-960 MHz, 2412-2484 MHz
 Impedance: 50 ohm
 Connector: N-female - 2*N-male/
 TNC-female - 2*TNC-male
 VSWR: < 1.5
 Temperature: -40°C - +80°C
 IP: 67, 62

- combining multiple antennas
- building up distribution cable harness
- 1 to 2 power splitting ratio
- different splitting ratios by cascading
- no additional jumper cables or connectors required
- minimizes the amount of junctions and losses

CS 1 TO 2 POWER SPLITTER

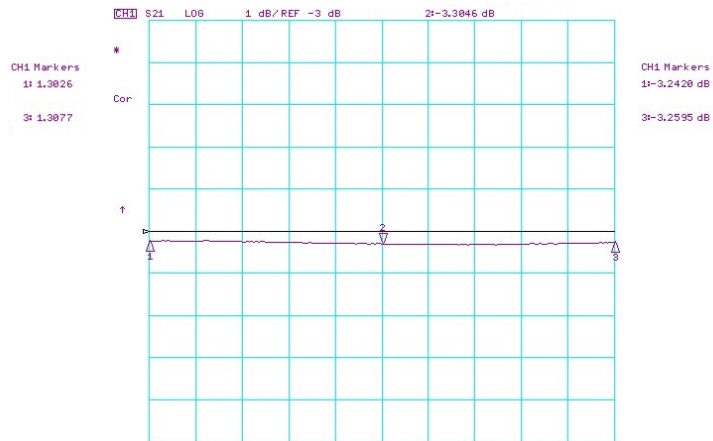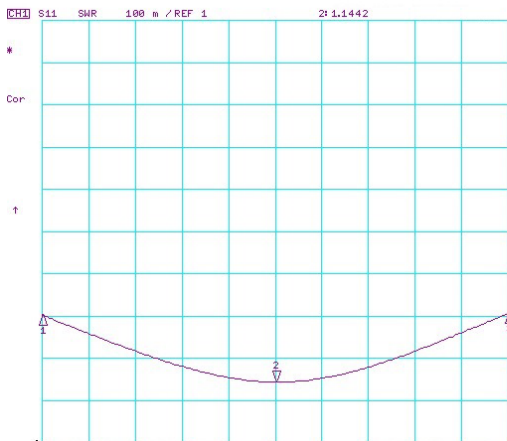

RoHS
Compliant

CompleTech
ComAnt[®] -antennas by CompleTech, Finland