

# ComAnt<sup>®</sup> Communications Antennas





## FREQUENCY INDEPENDENT DATA

Description: lightning rod support,  
protective cone according to  
DIN V VDE 0185

Connector: 1 x 16 mm<sup>2</sup> - 2 x 25 mm<sup>2</sup>  
Attachment: Ø 35-60 mm, aluminium alloy  
bracket, stainless steel V-  
bolts and self-locking nuts

Temperature: -40°C - +80°C

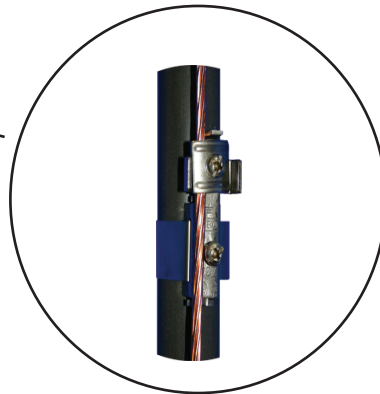

h [m]	α [°]
20	15
40	30
60	45

LR LIGHTNING ROD SUPPORT



RoHS  
Compliant

CompleTech  
ComAnt<sup>®</sup>-antennas by CompleTech, Finland