

ComAnt[®] Communications Antennas





FREQUENCY INDEPENDENT DATA

Description: lightning rod support,
protective cone according to
DIN V VDE 0185

Connector: 1 x 16 mm² - 2 x 25 mm²
Attachment: Ø 35-60 mm, aluminium alloy
bracket, stainless steel V-
bolts and self-locking nuts

Temperature: -40°C - +80°C

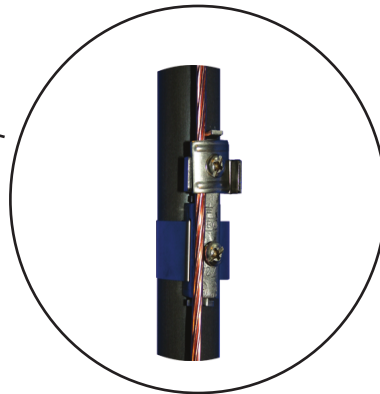

h [m]	a [°]
20	15
40	30
60	45

LR LIGHTNING ROD SUPPORT



RoHS
COMPLIANT

CompleTech
ComAnt[®] -antennas by CompleTech, Finland